




HF58 拖链—安装尺寸及技术参数

HF58 Cable Chain—Installation Dimensions and Technical Parameters

架空长度 Unsupported length

- L_G = 直线架空长度
- L_A = 安全塌腰架空长度

- L_G = Unsupported with straight upper run
- L_A = Unsupported with permitted sag

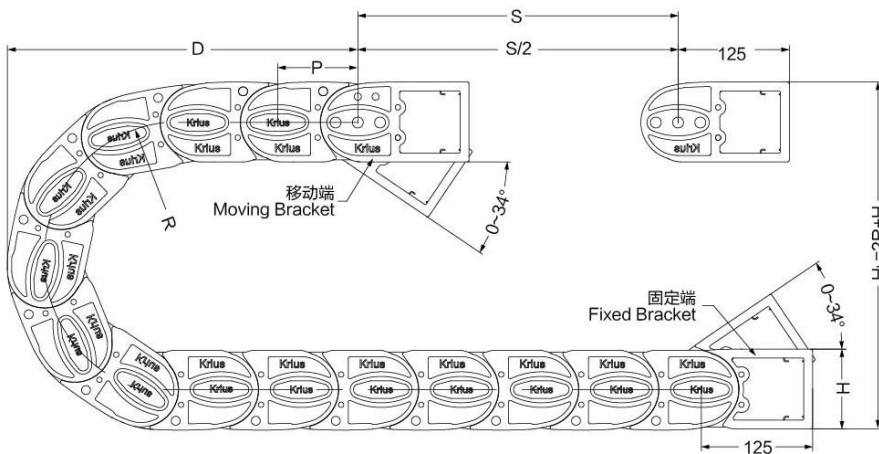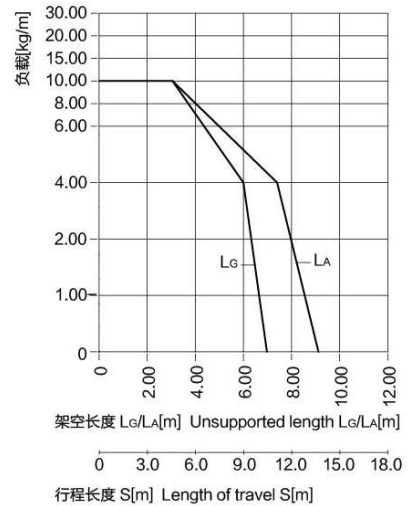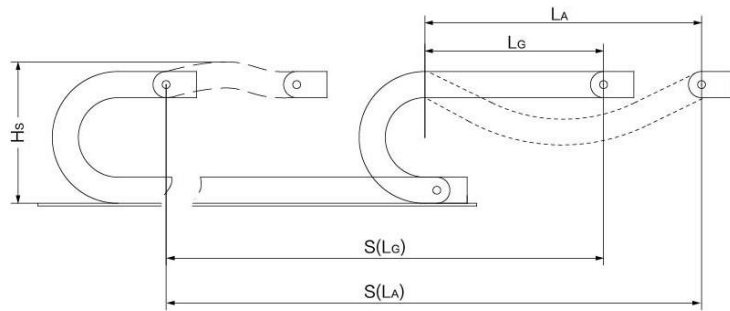

- S = 行程长度
- R = 弯曲半径
- P = 节距
- L = 拖链长度
- N = 每米链节数
- H_L = 理论安装高度
- H_s = 实际安装高度
- D = 拖链退回极限位置时的最小距离
- $K = \pi \cdot R + 2P$
- * K值可在科瑞斯相关表格中直接查询
- S = Length of travel
- R = Bending Radius
- P = Pitch
- L = Length of chain
- N = Links per meter
- H_L = Nominal clearance height
- H_s = Required clearance height
- D = Overlength Energy Chain radius in final position
- $K = \pi \cdot R + 2P$
- * You can find it from below chart for more details

R	H_L	D	K	P
200 (7.87)	490 (19.29)	410 (16.14)	810 (31.89)	90 (3.54)
250 (9.84)	590 (23.23)	510 (20.08)	965 (37.99)	90 (3.54)
300 (11.81)	690 (27.17)	610 (24.02)	1120 (44.09)	90 (3.54)
400 (15.75)	890 (35.04)	810 (31.89)	1435 (56.50)	90 (3.54)


实际安装高度: $H_s = H_L + 85\text{mm}$
 拖链长度: $L = S/2 + K$
 每米链节数: $N = 11$ (990mm)

The required clearance height: $H_s = H_L + 3.35\text{in.}$
 Chain length: $L = S/2 + K$
 Links per meter: $N = 11$ (38.98 in.)

技术参数 Technical Parameters		
速度/加速度 L_G	Speed/acceleration L_G	max.25[m/s]/max.205[m/s ²]
速度/加速度 L_A	Speed/acceleration L_A	max.5[m/s]/max.8[m/s ²]
滑行速度/加速度	Gliding speed/acceleration	max.5[m/s]/max.12[m/s ²]
材料—允许温度 °C	Material—permitted temperature	igumid G/−40°C至+125°C
阻燃等级, igumid G	Flammability Class, igumid G	VDE 0304 IIC UL94 V2

HF58 拖链-产品规格范围 HF58 Cable Chain-Product specifications


HF58拖链-内外侧可开 HF58 Cable Chain-Inner and outer can be opened



产品代码结构
Part Number Structure

HF58150*R*L*n

- 数量 (Quantity)
- 拖链长度 (Length of Cable chains)
- 弯曲半径 (Bending Radius)
- 内宽 (Inner Width)
- 型号 (Type)

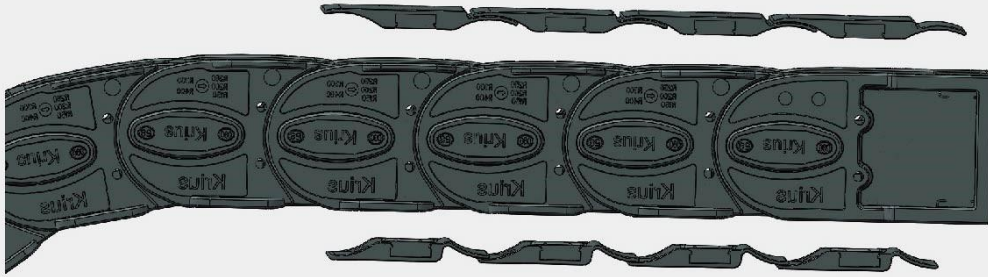

型号 Type	弯曲半径<R> Bending radius	内高<Hi> Inner height	内宽<Wi> Inner width	外高<H> Outer height	外宽<W> Outer Width	重量<G> Weight	备注 Remark
	mm (in.)	mm (in.)	mm (in.)	mm (in.)	mm (in.)	kg/m (lbs/ft)	
HF58150		59.5 (2.34)	150.2 (5.91)	89.8 (3.54)	190.2 (7.49)	4.47 (3.04)	
HF58200			200.2 (7.88)		240.2 (9.46)	5.33 (3.62)	
HF58250			250.2 (9.85)		290.2 (11.43)	5.86 (3.98)	
HF58300			300.2 (11.82)		340.2 (13.39)	6.39 (4.35)	

订货范例
Order details


HF58150 * R200 * 1000mm * 2

R	Hl	D	K	P
200 (7.87)	490 (19.29)	410 (16.14)	810 (31.89)	90 (3.54)
250 (9.84)	590 (23.23)	510 (20.08)	965 (37.99)	90 (3.54)
300 (11.81)	690 (27.17)	610 (24.02)	1120 (44.09)	90 (3.54)
400 (15.75)	890 (35.04)	810 (31.89)	1435 (56.50)	90 (3.54)



HF58 拖链-拖链接头 HF58 Cable Chain-Mounting Bracket

塑料接头或钢制接头，分体式 Plastic or Steel Mounting Bracket, Splited structure

- 双侧独立式塑料接头或钢制接头
- 两端接头均可活动
- 耐腐蚀 & 耐摩擦
- 可提供预装配形式
- 可实现内外连接
- Independent Plastic or Steel mounting bracket on the two end
- Moved connectors on both sides
- Anti-corrosion, Rub-resistance
- Available preassembly form
- Can realize the internal and external connections

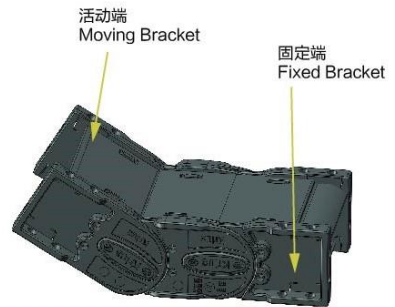

可选配的接头安装方式 Available installation methods

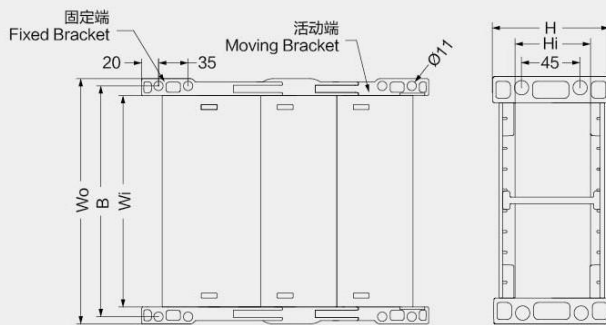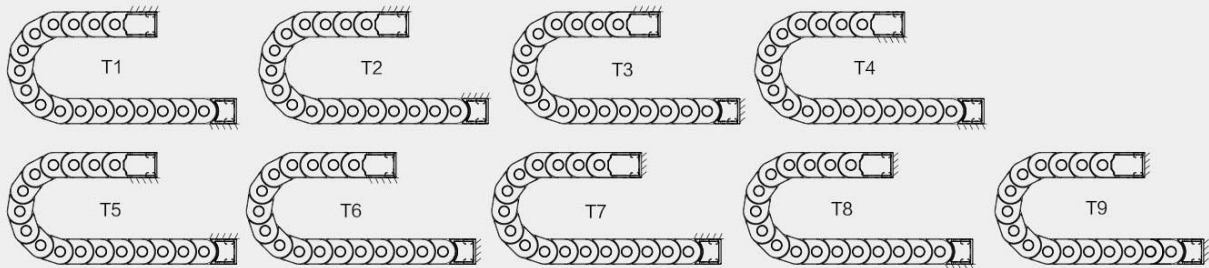

HF58150
HF58200
HF58250
HF58300

拖链型号 Type	拖链编码 Code	其他编码 Other Code	Wo尺寸 Dimension Wo	B尺寸 Dimension B
			mm(in.)	mm (in.)
HF58150	11247	接头 14131	190.2 (7.49)	173.2 (6.82)
HF58200	11248	Mounting Bracket 14132	240.2 (9.46)	223.2 (8.79)
HF58250	11249	隔离片 11245	290.2 (11.43)	273.2 (10.76)
HF58300	11250	主体 Main Body Code 11243	340.2 (13.39)	323.2 (12.72)
		固定片 11244		

产品代码结构 Part Number Structure

HF58150*B*T1




- HF58150*B*T1*n 两端接头
On both brackets
- HF58150*f*T1*n 固定端接头
Fixed bracket
- HF58150*m*T1*n 移动端接头
Moving bracket]

★ 每款拖链的接头都有所不同，订购时如有任何疑问，请及时咨询科瑞斯。
Every bracket is different, please contact us if you have any question.



HF58 Cable Chain
拖链

HF58 拖链-隔离片 HF58 Cable Chain-Separator

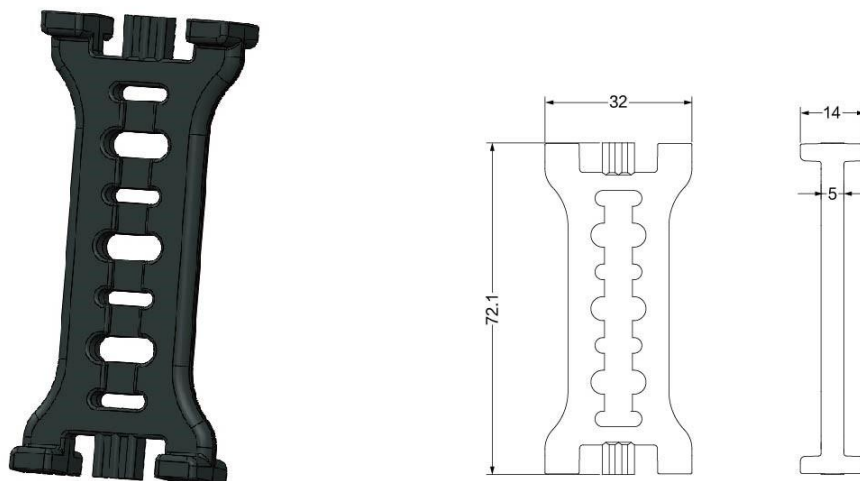

HF58拖链隔离片编码: 11245
The separator No. for HF58: 11245

- 本款拖链标配隔离片为竖隔片, 可以实现垂直分隔, 也可订制铝杆作为横隔片, 实现水平分隔
- 竖隔片的数量可以根据客户的实际需求进行配备, 可以每隔一个链节装一个, 也可以每隔一个链节装几个, 客户可任意配备
- 竖隔片安装完成后, 不可滑动
- The standard separator is vertical direction which can make the vertical division, and also we can customize horizontal Al separator for horizontal division
- Vertical separators can be placed into each link or different quantity links, it can be customized
- Separator can't be moved after assembling